


# WELLDANA® PUBLIC SPA UNITS

## WELLDANA® UNIT - COMMERCIAL2

Welldana® Spa unit for spa with gutter. For commercial use.  
Rate of turnover time, not lower than 0,10 hour, at 2100 litre water.  
Designed for use at **14 persons per hour**.

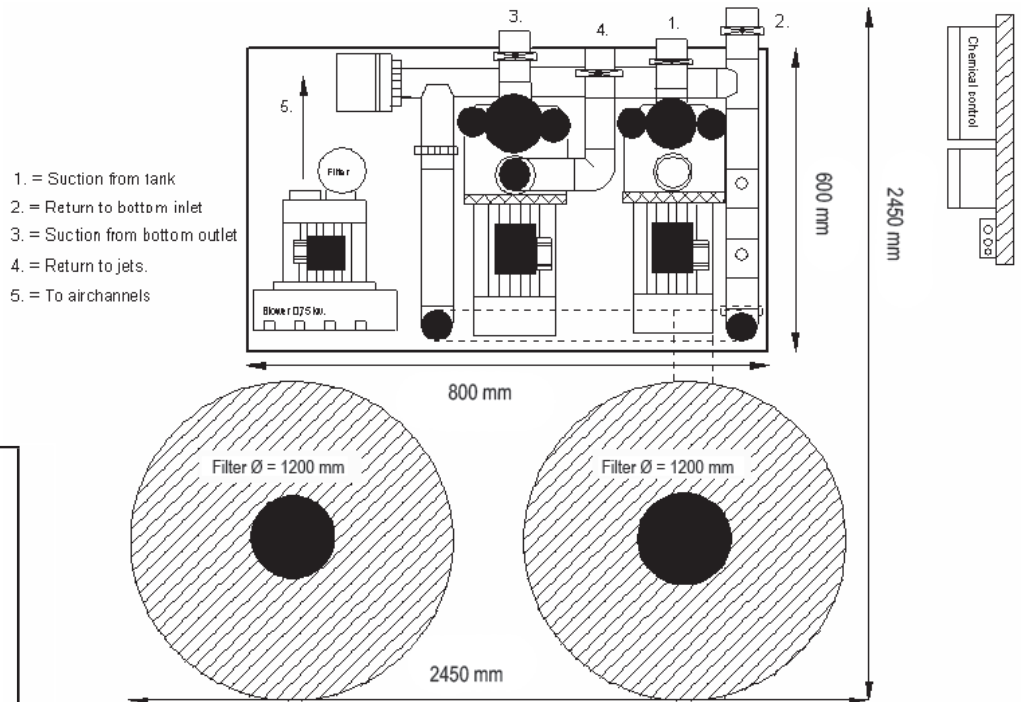

Welldana® units are dimensioned after the present DIN standards but local authorities may have different installation requirements.

External motor protections, timer function and fittings needed to connect the unit and balancetank with the spa are **not** included.

Type 46-100310. Contains following items. ( Kit )		Part number
Filterpump	2,2 kW. 3-phase. Welldana® Maxi. 42 m³. (without motorcover)	36-144220
Sand filter	2 x 1,13 m². D 1200 mm. 2 pcs . (with valves)	45-201200
Hydro jetpump	2,20 kW. 3-phase. Welldana® Maxi. 37-40 m³. (without motorcover)	36-144220
Blower	1,3 kW. 3-phase. Side channel type with airfilter. (without motorcover)	66-114130
Heater	9 kW. 400 volt. With hi-limit. Protected with pressostat	34-110409
Spa transformer	230/12 volt. 60 VA	64-350148
Balance tank	1500 l. With manhole	65-301500
Chemical tanks	2 x 60 l	30-601060
Chemical pumps	2 x 1 L. 230 volt	30-601011
Chemical control	pH and free chlorine. Digital LCD & LED display. Complete with flowcell	30-203100
Image® Poolcontrol	Digital remote control for heat control, Digital temperature display Filtration, water level + all safety systems	34-015040/34-015041
3-function control	For hydro-jet pump, blower and spa light. Round touch model	64-107030/64-107213
Volt	1 main cable 400V 2N volt. 16 amp 1 main cable 400 volt. 16 amp. (heater)	

The above items will be delivered as a **(do-it-yourself)** kit.  
The room size needed for the installation will be following:  
Minimum room size: Length 2,5 m. Width 2,5 m. Height 2,30 m.