
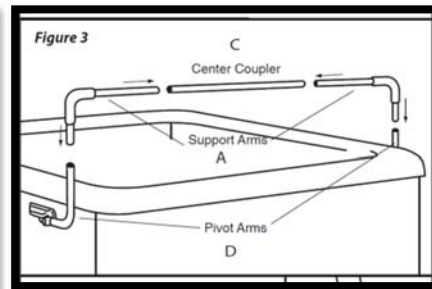


# CoverMate I

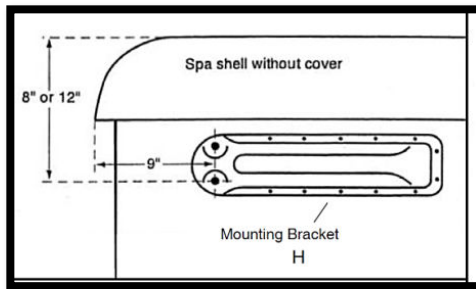

## Includes

- Black powder-coated, rust-free aluminum tubing
- Euro-styled composite, non-corrosive mounting brackets
- Foam grips for comfortable handling
- TowelMate for hanging up to three towels

- |  |
|--|
| ○ Requires <b>10 to 15 inches</b> of clearance behind the spa  |
| ○ Requires <b>4 to 5 inches</b> of clearance on each side of the spa   |
| ○ Fits virtually any spa from <b>6 feet to 8 feet</b> in length and width  |
| ○ If bracket is mounted 8" down from the top of the spa, 75% of the cover will be above the spa                                  |
| ○ If bracket is mounted 12" down from the top of the spa, 50% of the cover will be above the spa (about 2" higher than the CMII) |

## Specialty CMI

- **Arctic:** Aluminum bracket: 7 1/3" L x 6" W
- **Coleman:** Aluminum bracket: 8 3/4" L x 6" W
- **Master:** Bracket has notch for metal frame (aluminum): 11" L x 6" W
- **Maxxus and Aspen:** Extended bracket (steel): 24" L x 3 1/2" W
- **Sundance:** Aluminum bracket: 11 1/4" L x 6" W
- ❖ **Extended Pivot Arms:** Increases length to 9'2"
- ❖ **Extended Bracket:** For spas with wide corner radius (over 12")
- ❖ **Extended Coupler:** Increases width to 9' 2"

## Dimensions

- ✓ **Plastic Bracket:** 14 1/4" L x 4 1/4" W
- ✓ **Support Arm:** 20" x 40" x 1 1/8" diameter
- ✓ **Pivot Arm:** 26" x 13 1/2" x 1 1/8" diameter
- ✓ **Coupler:** 42" L x 1 1/4" diameter
- ✓ **Extended Bracket:** 24" L x 3 1/2" W
- ✓ **Extended Pivot Arm:** 31 1/4" x 13 1/2"
- ✓ **Extended Coupler:** 55" L x 1 1/4" diameter
- ✓ **Foam Grip:** 8"