
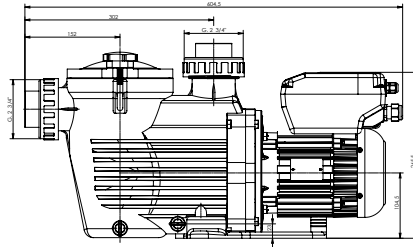


Technical Specifications


Max. water temp. / Max. pressure	50°C / 2,5 bar
Connection (DIN slip included, for others please ask)	Ø 50 - 1 1/2" and Ø 63 - 2"
Mechanical seal	AISI 316, suitable for salt water
Motor-drive specifications	Class F, IP55, 50 Hz, single phase
Housing/impeller/strainer/lid	PP + F.G./Noryl®/PP/SAN®



Single Speed models can be easily replaced with a VS equivalent.

(No need to retrofit or modify hydraulic connections).

Water column pressure (m)

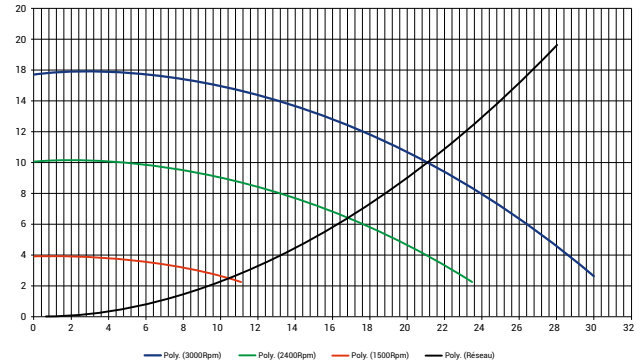

Water flow rate (m³/h)

KRIPSOL

welldana