

# ARTIK CLASSIC

CLASSIC LINE

YEARS OF WARRANTY | 3 | 2  
TANK EQUIPMENT

## ROBUST AND RELIABLE, PROBLEM-FREE FILTERING

- » A quality solution available with top or side mounted valve
- » 6-way valve included
- » **Optimal distribution of water** over the bed, thanks to the Dual-Side diffuser
- » Quick-connect collector arms, **easy to replace**
- » Internal monoblock element, **without slip fittings**
- » Wide drain, no tools required for opening, **easy maintenance**
- » **Usage: for residential pools up to 189 m<sup>3</sup>**



Difusor dual side



Wide double draining, water/sand



Internal monoblock element



Side version





Top version

Code	Ref.	Connection	Filtration area (m <sup>2</sup> )	Flow rate (m <sup>3</sup> /h) @ v(m <sup>3</sup> /h/m <sup>2</sup> )			Sand (kg)	Vitrafil (kg)	Pools up to (m <sup>3</sup> )	Dimensions (mm)					Weight (kg)	Vol. (m <sup>3</sup> )
				30	40	50				A	B	C	D	E		
022140143723	AK 400	1,5"	0,13	3,9	5,2	6,5	50	40	39	225	350	665	458	300	11	0,127
022152143723	AK 520	1,5"	0,21	6,3	8,4	10,5	100	80	63	305	430	775	458	300	15,5	0,242
022164143723	AK 640	1,5"	0,32	9,6	12,8	16	165	135	96	315	440	860	458	300	21	0,366
022168243723	AK 680	2"	0,36	10,8	14,4	19	220	180	114	320	455	900	605	300	25	0,406
022176243723	AK 760	2"	0,45	13,5	18	22,5	305	245	135	365	455	900	605	300	31	0,608
022190243723	AK 900	2"	0,63	18,9	25,2	31,5	425	340	189	365	505	900	605	300	40	0,902
022240420023	AKT 400	1,5"	0,13	3,9	5,2	6,5	50	40	39	660	920	-	458	-	10,5	0,123
022252420023	AKT 520	1,5"	0,21	6,3	8,4	10,5	100	80	63	735	995	-	458	-	15,5	0,242
022264420023	AKT 640	1,5"	0,32	9,6	12,8	16	165	135	96	800	1060	-	458	-	21	0,366

### Technical Specifications

Max. water temp.	50 °C
Operating pressure	0.5 - 1.3 bar
Maximum pressure	1.6 bar
Connection	1.5" (ø 520 mm - ø 640 mm) 2" (ø 760 mm - ø 900 mm)
Tank / Arms / Unions / Cover	Polyester with F.G./PP/ABS/ PP+F.G.
Granulometry of filter material	0.4 - 0.8 mm

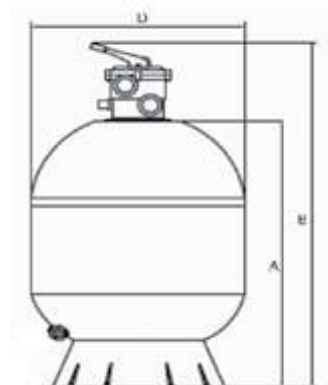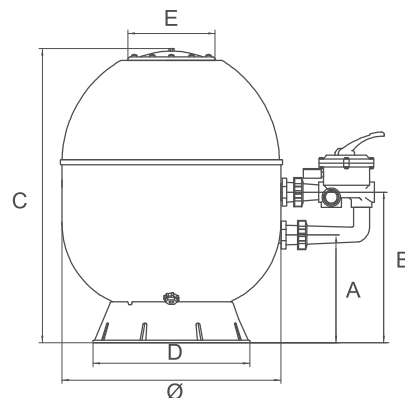

\* The VariFlo™ valve is available for AK filters with up to 640 mm with a 1.5" connection. For all other models (dimensions 680, 760 and 900 mm) a VK valve is included.